

Features & Ordering Code

Features

- 4 Digit LED display
- Accuracy: 0.25% and 1% F.S for option
- Range: Vacuum to 600Bar
- Can display Max and Min value
- Different pressure units selected by software
- Different thread size for option
- Output 4-20mA and 0-10V for option

Ordering Code

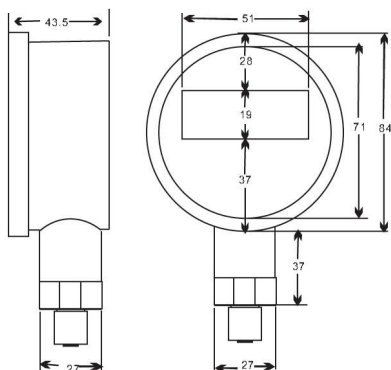
ASP-801E  **Accuracy:** A: 1% F.S B: 0.25% F.S
Alarm: Blank: No alarm J1: 1 alarm J2: 2 alarm
Range: Vacuum to 600Bar
Output: Blank: No output 300: 4-20mA 210: 0-10V
Thread Size: 1: Standard M20X1.5 2: G1/2 3: G1/4 & 1/4NPT
ASP-801E Series LED Display Digital Pressure Gauge

Example: ASP-801E 3300-10Bar-J1-B: means the DPG is in 1/4 NPT or G1/4 thread size, with 4-20mA output, measuring range is 0-10Bar, 1 alarm and the accuracy is 0.25% F.S



Technical Data & Sizes

1 YEAR REPLACEMENT & REPAIRABLE WARRANTY FOR QUALITY

**Size**

Technical Data

Accuracy:	Silicon 0.25% F.S Ceramics: 1%
Power Supply:	10-33VDC
Pressure Range:	Vacuum to 600Bar
Housing:	Stainless Steel
Operating Temperature:	-20 to 85 Degrees
Store Temperature:	-20 to 85 Degrees
Temperature Shift:	0.05% F.S per Degree
Size:	84mm dia
Engineering Unit:	Any unit for option when ordering
Thread Size:	M20X1.5, G1/2, 1/4 NPT and others
Frontal Panel:	Polycarbonate,
Max Allowed Load:	RL less than 600 Ohm
Over Pressure:	200% of the Pressure Range, Less than 1200Bar
Burst Pressure:	400% of the Pressure Range, Less than 1200Bar
Output:	4-20mA or 0-10V or RS485
IP Rate:	IP66
Weight:	0.75 Kgs

ASCORP Pressuremesstechnik

Technology Partner : ASMA INDUSTRIAL CORPORATION

Registered Office : 83/85, Netaji Subhas Road, Ground Floor, Shop No. A30, Kolkata - 700 001

Ph No. +91 033 22310235, 39855209

Showroom : 40, Netaji Subhas Road, Ground Floor, Kolkata - 700 001

E-Mail : SALES : sales@asmaindustrial.com SERVICE : service@asmaindustrial.com

TECHNICAL : technical@asmaindustrial.com INFO : info@asmaindustrial.com